



1 18-23°C
64-73°F 48h

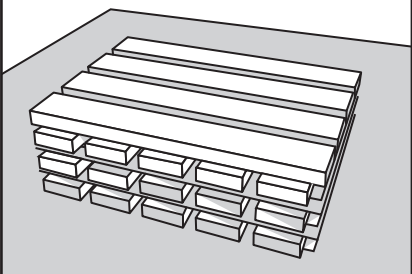


2

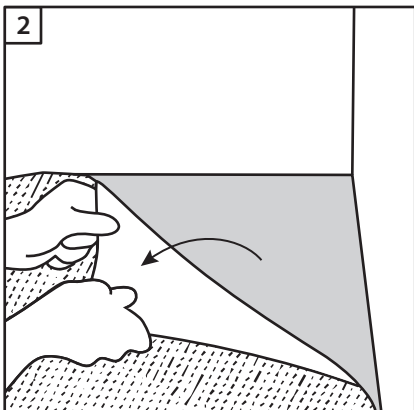


3


DIN 18365, EN 1264
CA 0,3 CM % CT 1,8 CM %

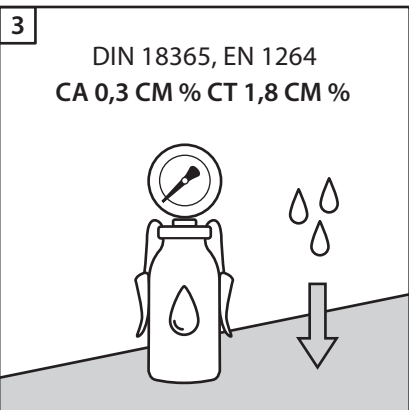


4

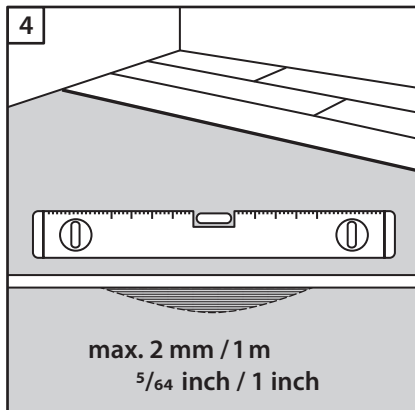


5

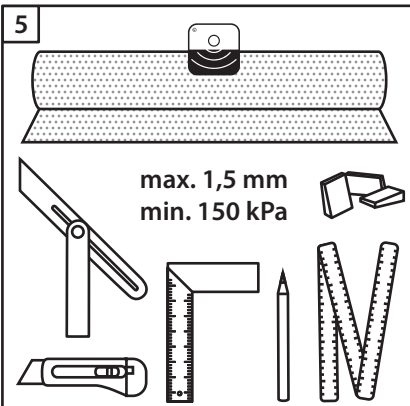


6

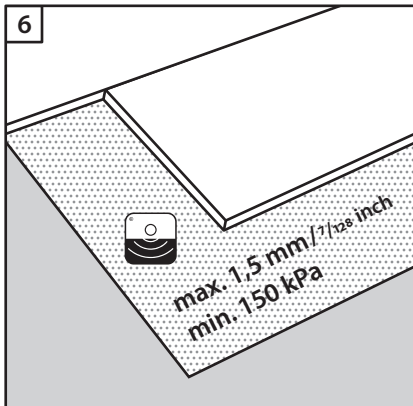


7

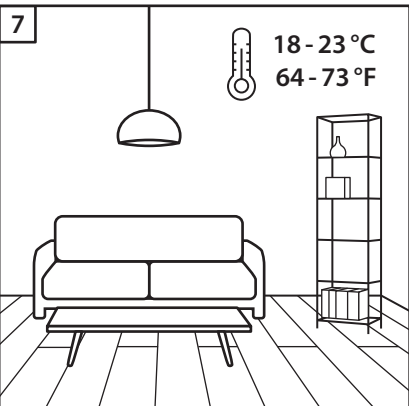


8

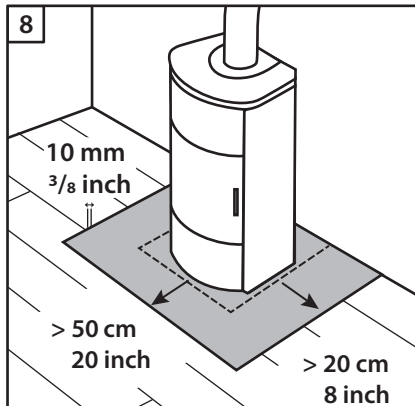


9

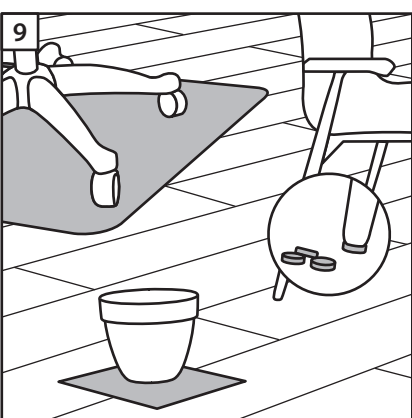


10

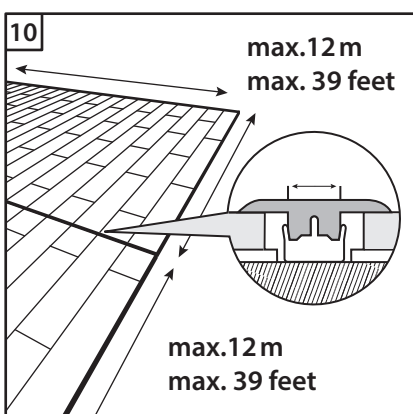


11

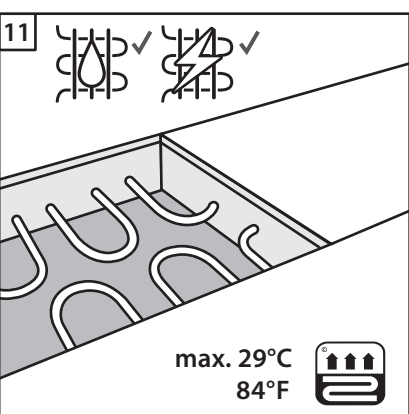


12

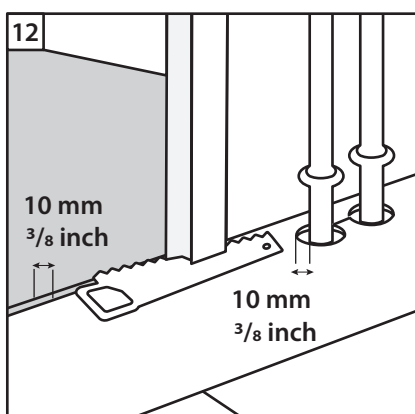


13

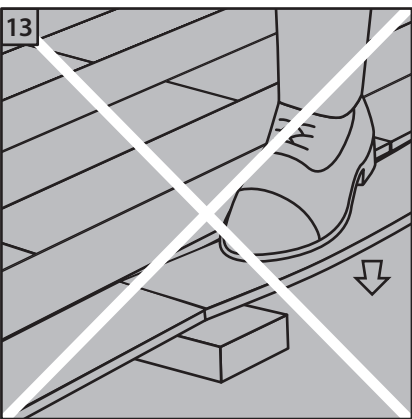


14

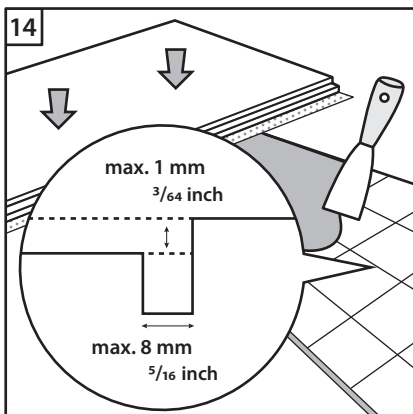


15

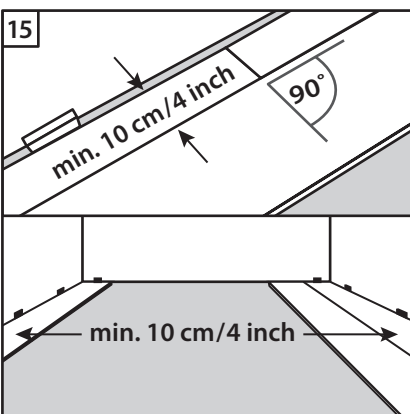


16

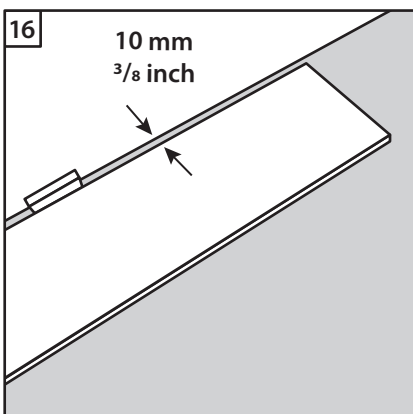


17

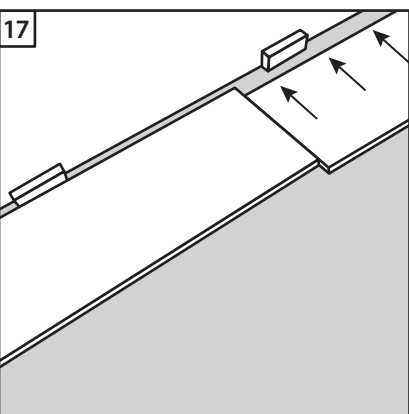


18

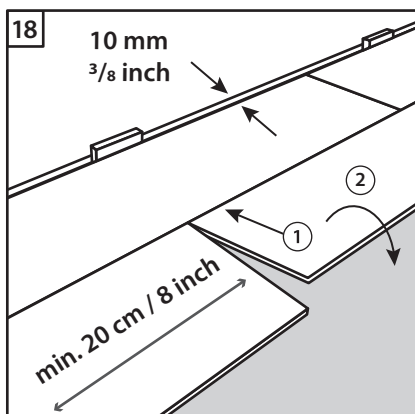


19

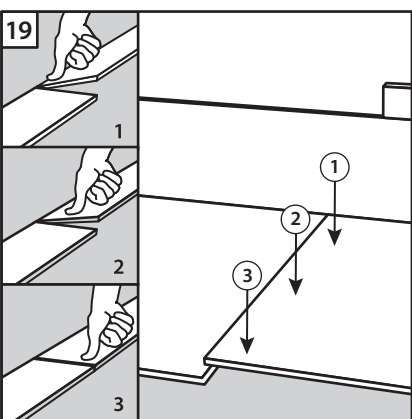


20

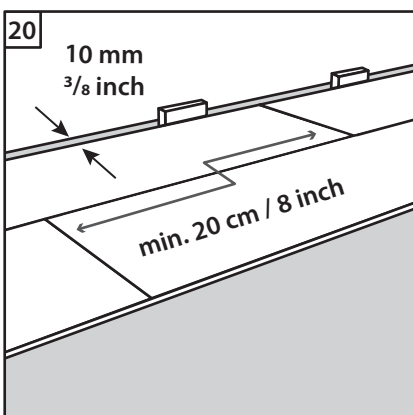


21

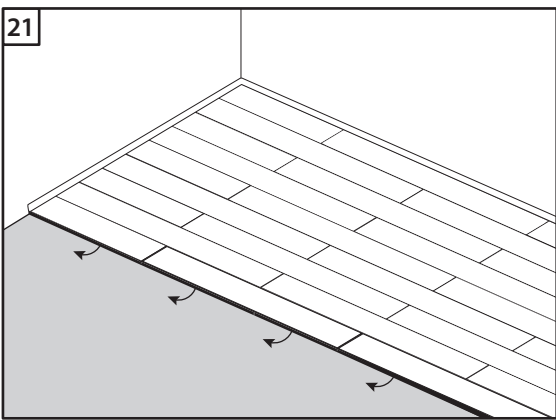


22

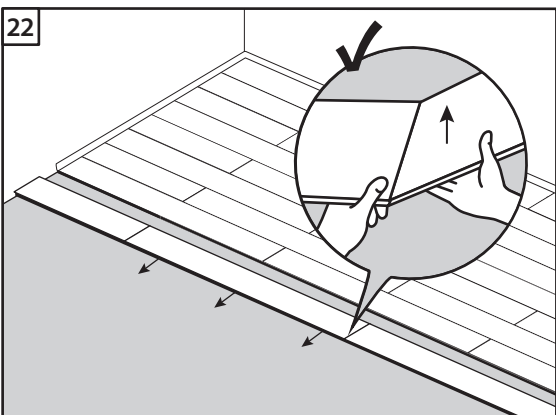


23

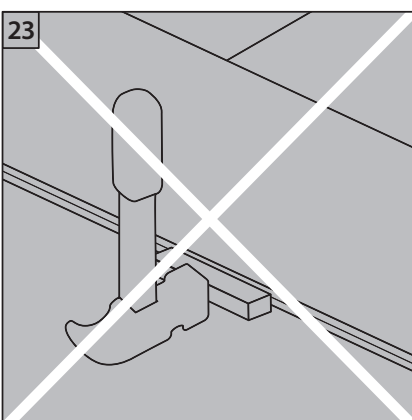


24

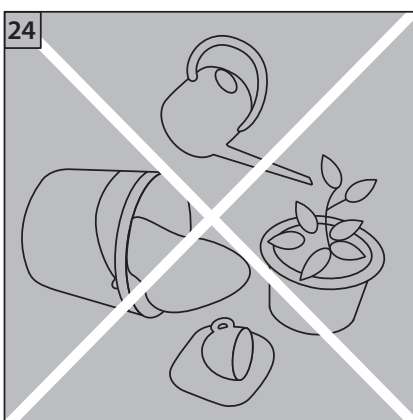


25

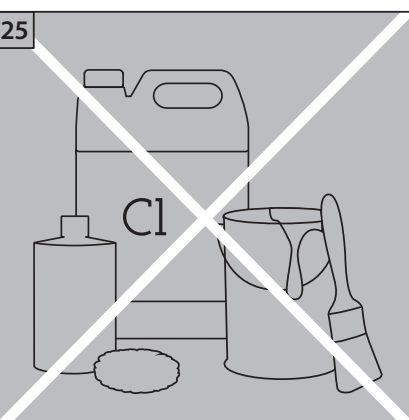


26

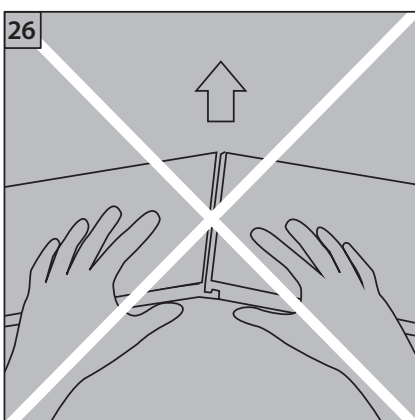


27

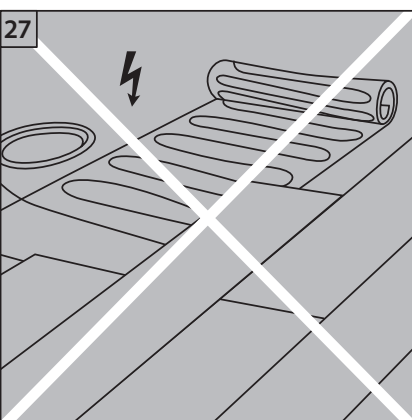

28

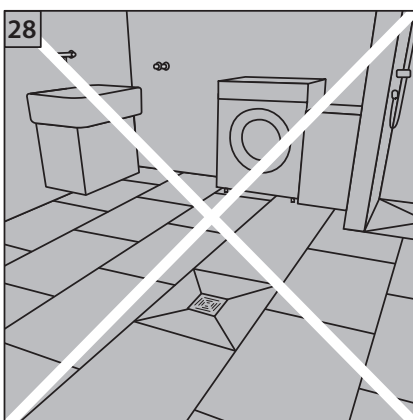

29

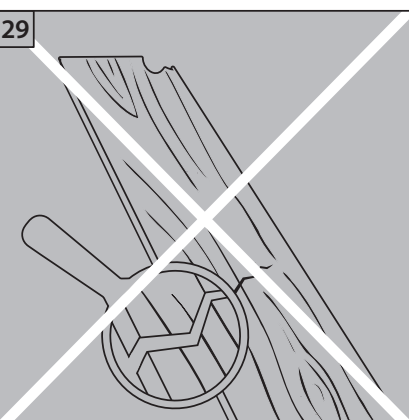

Written Installation Instructions –
Professional Tips – Certificates